



## Razor Wireless Siren - Set Up Guide

**Razor** is a siren warning device that produces high volume warning sounds and low volume notification sounds.

### Features

- Runs on user-replaceable alkaline AAA batteries
- Secure encrypted wireless communications
- 5 year warranty

**Sounds** a high volume warning for burglary, smoke and carbon monoxide alarm conditions. Low volume notification sounds are made for auxiliary alarm, status, and trouble conditions.

**Enroll** by placing the Smart Hub into wireless enrollment mode by pressing the red button on the side until you hear a beep (about 3 seconds). Then press the Razor's enrollment button located inside the battery compartment.

- Once enrolled, arm and disarm your system to verify Razor is within range of the Smart Hub and properly enrolled


**Install** by mounting the siren to a wall using the mounting screw holes on the back plate.

**To replace the batteries**, remove bottom screw and pull the bottom away from the back plate and slide downward. Next, slide the battery door off to expose the batteries.


**An optional AC adapter** allows for the siren to be powered from an electrical outlet. When an AC adapter is used the batteries act as a backup power source.

### AC Adapter Part Numbers


- RE012-9 USA and Canada
- RE012-10 Australia and New Zealand
- RE012-11 United Kingdom
- RE012-12 Europe




Enroll Button



Optional AC Adapter Port

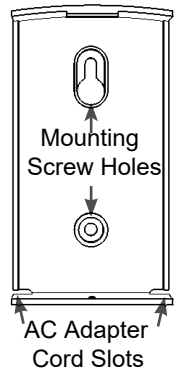

Bottom Screw



Use the JAQX Quick Start guide to verify proper system setup.

# Specifications

Physical	
Housing Dimensions	4.1 x 2.6 x 1.2 inches (10.4 x 6.7 x 3.0 centimeters)
Weight with Batteries	4.7 ounces (132 grams)
Mounting Fastener	#4 or #6 screws
Environmental	
Operating Temperature	32°F to 120°F (0°C to 49°C)
Maximum Humidity	85% non-condensing relative humidity
Sensor Specifications	
Frequency	2.4 GHz
Replacement Batteries	Three Panasonic alkaline AAA
Nominal Battery Life	6 Months
Battery Voltage	4.5 VDC (Nominal) 3.6 VDC (Low) 100
Current Draw Sounder	mA (Maximum) 4.0 uA (Quiescent) 90
Loudness Sounder	dBA at 10 feet
Frequency Transmitted	3.2 kHz to 4.0 kHz
Indications	Low Battery, Supervisions
Certification	
RE626	FCC, IC
RE626-CE	EN60950-1, EN300 220, EN301 489, CE, RCM

*Specifications subject to change without notice*

## WARRANTY

Resolution Products will replace products that are defective in their first five (5) years.

## IC NOTICE

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux cnr d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage, et
- (2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE626

## FCC NOTICE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE626

## CE DECLARATION OF CONFORMITY

Hereby, Resolution Products, Inc. declares that this RE626-CE is in compliance with the essential requirements and other relevant provisions of directive 1999/5/EC.

*(This declaration can be translated to other languages via a myriad of translation tools found on the Internet.)*